


Notes

1. All annotations and dimensions on this drawing complement or superseded the Highway England Specification for Highways which shall otherwise apply (along with the appropriate Appendices) to all works and materials required for this Standard Detail.
2. All dimensions are in millimetres unless shown otherwise.
3. Column and post shall have a G2a protection system EPA Compliant Amended Oxfordshire Specification (see Appendix 19/3). Final coat shall be Jet Black RAL 9005, with applied sections of Pure White RAL 9011.
4. All columns shall be numbered at the time of erection with a 50mm high black figure(s) on a white background. This is to be a self adhesive (one piece) label manufactured by BRADY UK (outdoor marking vinyl film ref:- B30C-2250-595-WT or similar approved). Numbers are to be applied 1.5m above ground level, and shall face the carriageway.
5. Manufacturers label must be fitted in the base of the column indicating production date and batch numbers for audit purposes.
6. See HSD/1400/005 for wiring details.
7. Beacon to be Simmonsigns ModuStar LED assembly.
Post top configuration
Ref : DG 129
Manufactured by Simmonsigns Ltd or similar approved.
8. Column door must be erected facing away from oncoming traffic.
9. Minimum post base thickness to be 5.0mm and shaft 3.0mm up to 6m high.
10. No trees are to be planted within ten metres longitudinal of a Sign or Column.
11. If required a NAL socket retention foundation system see HSD/1200/005 to be used as specified by Engineer.

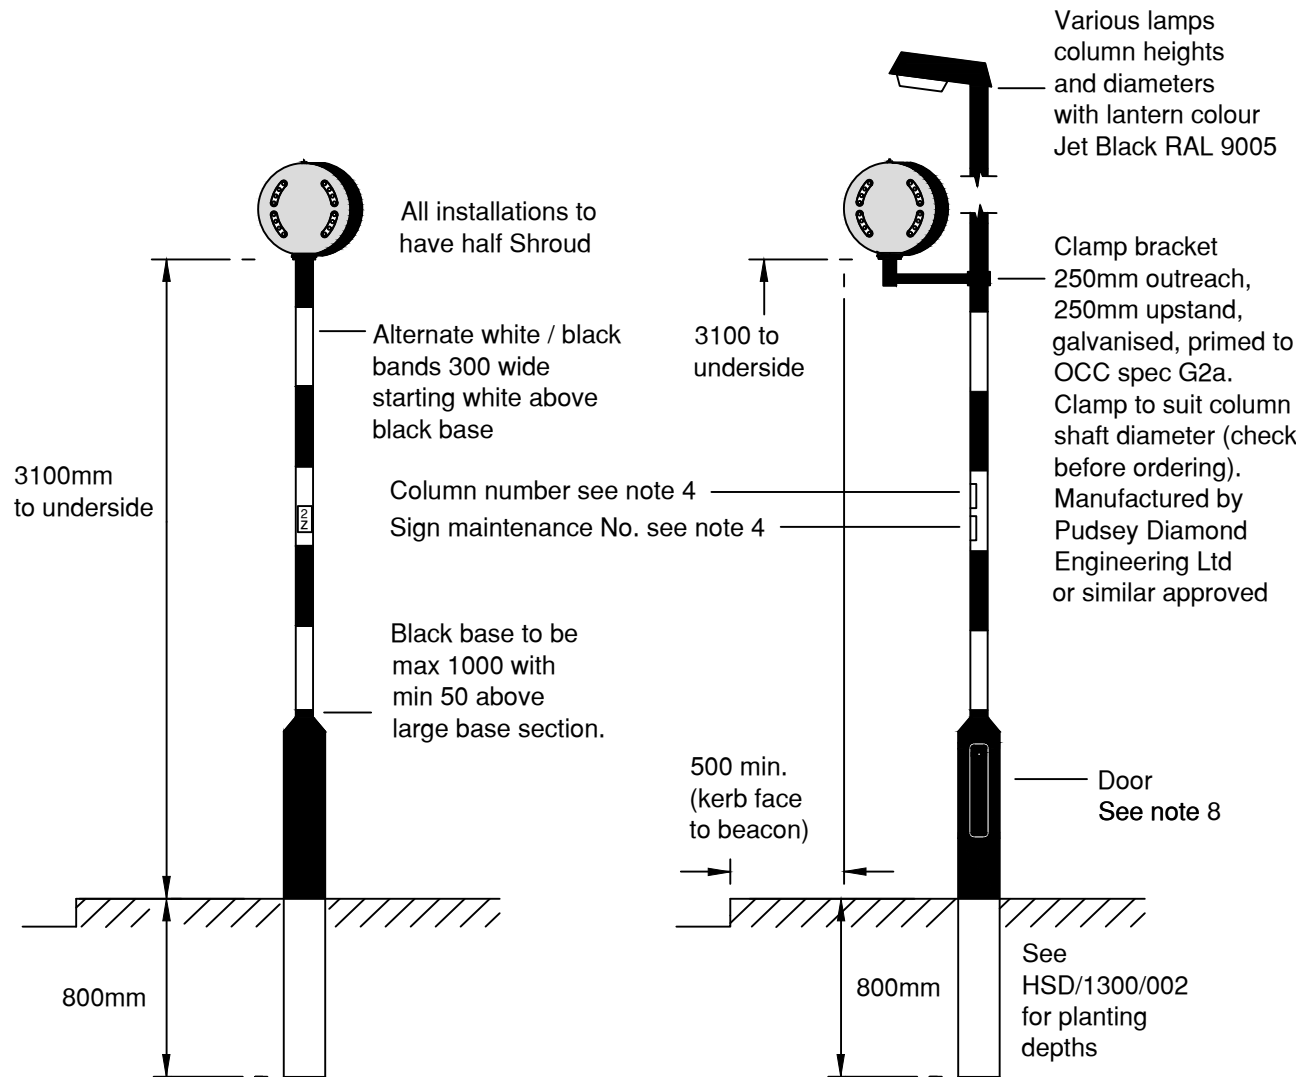

Zebra crossing signal assembly

Traffic signs

© Unauthorised reproduction infringes copyright

Scale
Not to Scale

	Initials	Date
Drawn	T P	05.18
Traced	D A B	05.18
Checked	A P-B	05.18

Index	Date
Drawing No. HSD/1200/010	